



# Quick Change Single Undersink

## Ultra-Compact, Premium Filter System

**Coconut Shell Carbon**  
for superior chemical filtration

**Easy Maintenance**  
with hygienic 'twist-off' cartridge

**5 Year Warranty\***  
handbuilt & wet tested before sale



The Quick Change Single Undersink system offers superior filtration efficiency within an ultra-compact, space saving design. Conveniently installed beneath the sink, the system occupies the average space of only a single water bottle.

Fitted with The Water Shop Premium Carbon Block filter cartridge, made in USA - the filter features premium carbon made from the highest quality NSF certified (ANSI 61) coconut shell based granular activated carbon and other proprietary adsorbent medias.

- The carbon block is made from premium coconut-shell carbon ensuring fresher, sweeter tasting water.
- 1 micron absolute filter for outstanding lead, chlorine, taste and odour reduction.



### 'Twist-Off' cartridges

Ensures a simple, hygienic, no mess means of system maintenance.



### Ultra-Compact Design

Ideal for use where undersink space is limited.



**WaterMark Certificate**  
No.: 23124

The Australian WaterMark Standard Approval of this system is your guarantee of quality.

### Specifications

Item No.	IT000469
Output @60 Psi 25°C	approx. 3 litres p/min
System Dimensions (cm)	9(W) x 33(H) x 9(D)
Micron Rating	1 micron absolute
Warranty	5 years*

### Among the many contaminants removed:

Aluminium	Iron
Barium	Lead
Cadmium	Manganese
Chlorine	Mercury
Chromium	Nitrate
Copper	PCB's
Cryptosporidium	Potassium
e-Coli	Radium
Giardia	Sodium
Hydrocarbons	Taste & Odour

For more information go to [www.watershop.com.au](http://www.watershop.com.au)

\*Warranty Terms & Conditions apply.

# Quick Change Single Undersink

## Step by Step Installation

- 1. Shut off the water supply** - Locate the ministop valve (see Diagram 1) for the cold water feed line. Close the feed water valve to shut off the water supply. Turn on the cold water faucet to assure that the line is completely shut off and drained.
- Using the selftapping screws provided, attach the filter system to the cupboard wall (allowing approx 50mm height beneath the system for servicing). The system may otherwise stand freely on the cupboard floor.
- 4. Attach plumbing assembly** - Unscrew the braided hose from ministop valve. In it's place, screw in the 1/2" Female/Male Tee. Re-attach the braided hose.
- 5. Faucet installation** - The pure water faucet may be installed on any flat surface over 50mm (2") in

diameter. Once the hole has been drilled install the faucet as per Diagram 1. Install the female Quick Fit Connector to the base of the faucet.

- 6. Activating the system for the first time** - Once all tubing has been connected, turn on the pure water faucet, then open the ministop valve slowly. This will allow any trapped air to escape. Check the plumbing assembly and system are secure and free from leaks.

If no leaks are detected, leave the pure water running for a few minutes to flush the filter cartridge. Water may be slightly discoloured and have some aeration, this is normal and will clear shortly. Allow the system to stand for 2 to 3 hours, then flush again for several minutes.

**Your system is now operational.**

## Undersink Setup

- 1 Filter Cartridge/Housing
  - 2 Chrome Faucet
  - 3 Stainless Steel Bracket
  - 4 Pressure Limiting Valve
  - 5 Tee Piece
  - 6 Ministop Valve
-  Red Clips

- A** 1/4" blue tube connects the feed water valve to the pre-filter.
- B** 1/4" blue tube connects the post filter to the chrome faucet.

Diagram 1


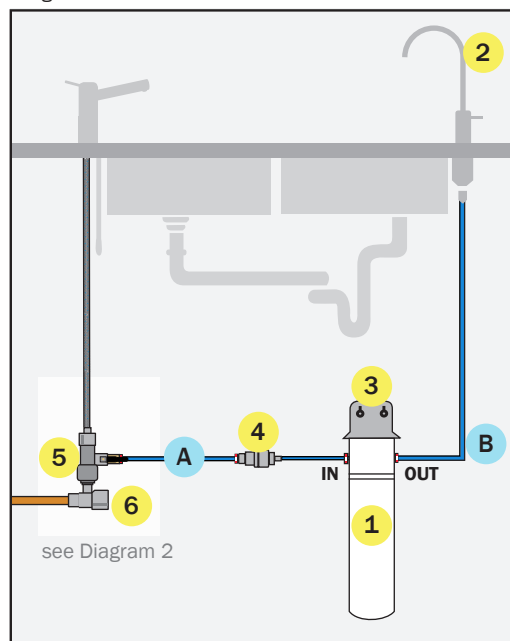


Diagram 2



## Includes your choice of Standard Filter Faucet

To view our complete range of faucets and mixers please refer to our Faucets Brochure.

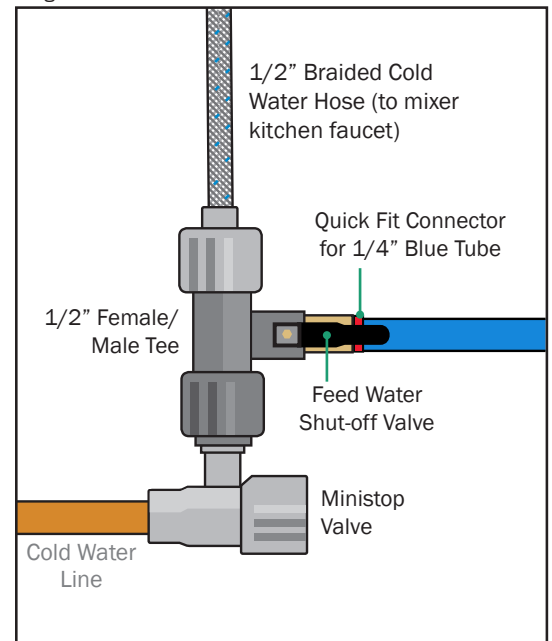

North Shore Showroom  
425 Miller Street, Cammeray NSW 2062

Inner West Showroom  
350 Parramatta Road, Stanmore NSW 2048

02 9458 1111 sales@watershop.com.au www.watershop.com.au